




TWO-CYLINDER OIL COMPRESSOR 100LT 10 BAR 3.0HP VICODC100

This 100 L professional compressor with a 3.0 hp (2.2 kW) oil-lubricated motor and dual-cylinder system delivers a strong and stable airflow suitable for workshops, carpentry, construction and industrial maintenance. Operating at 10 bar with a maximum airflow of 334 L/min, it supports impact wrenches, nailers, spray guns, grinders and other air-hungry tools. The 15W-40 lubricated motor ensures smoother operation, lower wear and increased service life, even during prolonged cycles. The large 100 L tank offers extended autonomy, reducing refill cycles and improving productivity. The unit includes thermal protection, a safety valve, On/Off switch and a 250 ml oil sump for reliable operation.

Key features

- > Large 100 L tank for extended runtime
- > 3.0 hp dual-cylinder oil-lubricated motor
- > 10 bar pressure for heavy-duty pneumatic tools
- > 334 L/min airflow for professional applications
- > 15W-40 lubrication for optimal motor longevity
- > Integrated thermal protection and safety valve
- > Top air outlet for fixed installations
- > Robust and reliable for workshop and construction use

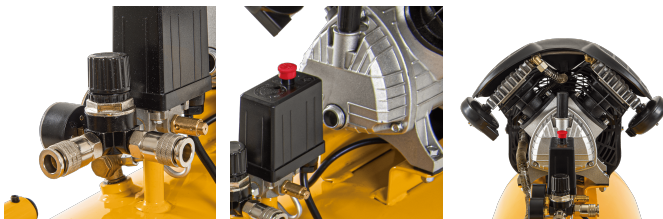

Specifications

Engine oil	15W-40
IP code	IP20
Maximum flow rate	334 L/min
Oil crankcase capacity	250 ml
On/off switch	Yes
Operating pressure	10 bar / 145 psi
Rated power	3,0 HP / 2,2 kW
Rotation speed	2850 rpm
Safety valve	Yes
Sound power level (LWA)	95 dB(A)
Supply voltage	230V AC 50Hz
Tank capacity	100 L
Tank top outlet for fixed network connection	Yes
Thermal protection	Yes