




## TWO-CYLINDER OIL COMPRESSOR 100LT 10 BAR 3.0HP VICODC100



This 100 L professional compressor with a 3.0 hp (2.2 kW) oil-lubricated motor and dual-cylinder system delivers a strong and stable airflow suitable for workshops, carpentry, construction and industrial maintenance. Operating at 10 bar with a maximum airflow of 334 L/min, it supports impact wrenches, nailers, spray guns, grinders and other air-hungry tools. The 15W-40 lubricated motor ensures smoother operation, lower wear and increased service life, even during prolonged cycles. The large 100 L tank offers extended autonomy, reducing refill cycles and improving productivity. The unit includes thermal protection, a safety valve, On/Off switch and a 250 ml oil sump for reliable operation.

### Key features

- > Large 100 L tank for extended runtime
- > 3.0 hp dual-cylinder oil-lubricated motor
- > 10 bar pressure for heavy-duty pneumatic tools
- > 334 L/min airflow for professional applications
- > 15W-40 lubrication for optimal motor longevity
- > Integrated thermal protection and safety valve
- > Top air outlet for fixed installations
- > Robust and reliable for workshop and construction use

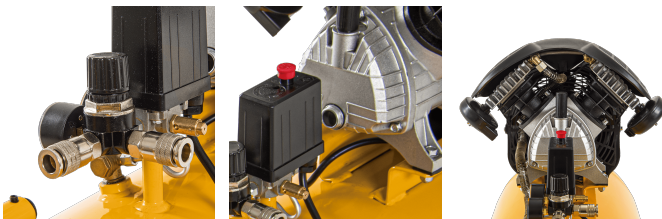

### Specifications

Engine oil	<b>15W-40</b>
Maximum flow rate	<b>334 L/min</b>
Oil crankcase capacity	<b>250 ml</b>
On/off switch	<b>Yes</b>
Operating pressure	<b>10 bar / 145 psi</b>
Rotation speed	<b>2850 rpm</b>
Safety valve	<b>Yes</b>
Sound power level (LWA)	<b>95 dB(A)</b>
Tank capacity	<b>100 L</b>
Tank top outlet for fixed network connection	<b>Yes</b>
Thermal protection	<b>Yes</b>
IP code	<b>IP20</b>
Rated power	<b>3,0 HP / 2,2 kW</b>
Supply voltage	<b>230V AC 50Hz</b>